


Correct closing will be accompanied by an audible "CLICK" and the green indicator will be visible.




Align the male part of the buckle with the female part and insert.


Quick Lock Buckle Operation - Opening



Withdraw the male part of the buckle.

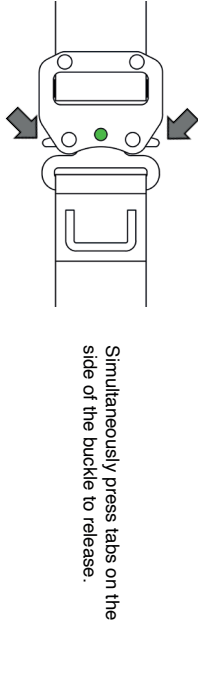

Simultaneously press tabs on the side of the buckle to release.

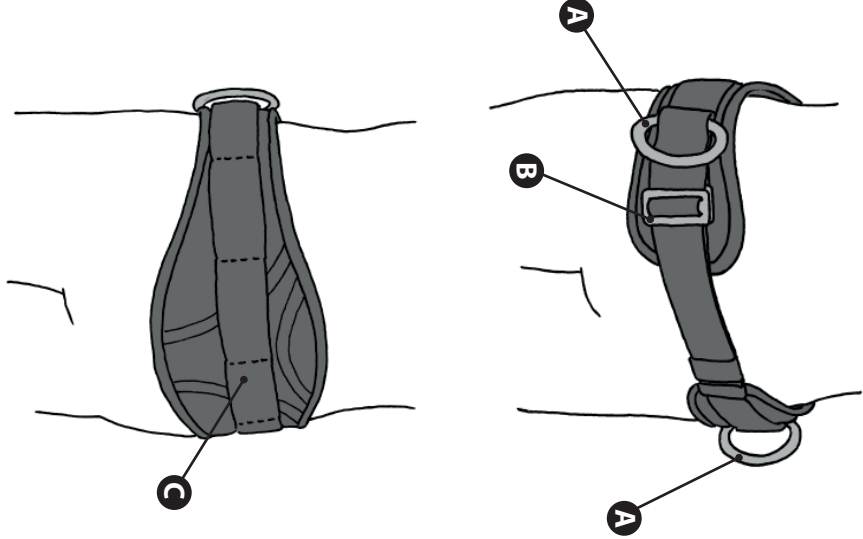

Quick Lock Buckle Operation - Opening

Lite Work Position Belt - Nomenclature

Inspection Record

PPE Issued To	
Date of Issue	
Model	
Serial Number	



Lite Work Position Belt

EN358:2018

Date Of Inspection	Comments & Observations	Inspected By	Next Inspection Due
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...
.../.../...			.../.../...

C€0598
UKA0120



Important

Trans-Web Ltd, Oldham, UK.
www.trans-web.co.uk
ISO9001

LITE Work Position Belt
EN358:2018

This product is compliant with the Regulation (EU)2016/425 as adopted and amended by UK law.

Approved body responsible for conducting UKCA type examination:
SGS United Kingdom Limited, Ellesmere Port, Cheshire CH65 3EN (0120)

Approved body responsible for conducting UKCA production control:
SGS United Kingdom Limited, Ellesmere Port, Cheshire CH65 3EN (0120)

Notified body responsible for conducting EU type examination:
SGS FIMKO OY, Takomotie 8, 00380, HELSINKI (0598)

Approved body responsible for conducting EU production control:
SGS United Kingdom Limited, Ellesmere Port, Cheshire CH65 3EN (0120)

Warning

Activities involving this equipment are inherently dangerous. This product must only be used by competent and responsible Users, or those placed under the direct and visual control of a competent and responsible person. You are responsible for you own actions, decisions, and personal safety. If you are not able to assume this responsibility, or do not fully understand the Instructions for Use, risks, consequences, and dangers – DO NOT USE this equipment.

Before using this equipment, you must:

- Read the instructions for use and understand the content
- Get training in the proper use of personal fall protection equipment
- Familiarise yourself with the capabilities and limitations of the equipment
- Understand the risks involved in the use of the equipment
- Inspect the product thoroughly


Failure to acknowledge the warnings in these instructions may result in serious injury or death.

These instructions explain how to correctly use your equipment however only the basic techniques and uses are described. It is impossible to describe all potential dangers related to the use of your equipment. Heed all warnings and only use the product in the correct manner described.

Any misuse of this equipment will create additional dangers and may risk your personal safety. Contact Trans-Web if you have any doubts or difficulty understanding these instructions.

Product Markings

Do not remove product markings as this invalidates the product, and the product must be removed from service.

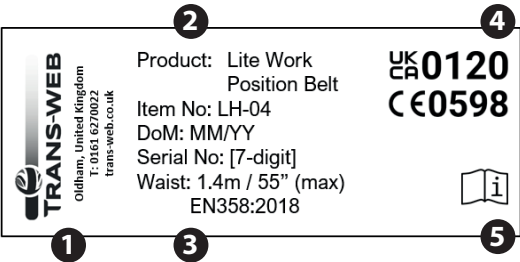

- 1 - Manufacturer's contact information
- 2 - Product details(*); model, item number, date of manufacture, unique serial number
- 3 - Applicable standard
- 4 - notified body responsible for production control
- 5 - read instructions for use.

CARE & MAINTENANCE

Lifespan up to 10years

Operational range: -30°C / +50°C

Avoid sharp edges, excess heat and open flames, and chemical contaminants.
Hand washing only in water at less than 30°C. Do not use detergents, power washers or washing machines. Allow to dry naturally out of direct heat sources and sunlight.

Store in a dry location out of direct sunlight.

No modifications or repairs are allowed.

If you have any questions, please contact Trans-Web.

General Information

1. Field of application

Personal protective equipment (PPE) used for fall protection.

Category: Work positioning belts.

This product must not be used beyond its limits, nor be used for any purpose other than that for which it is designed.

2. Nomenclature

(A) EN358 work position and restraint rope d-rings, (B) closing buckle and length adjustment, (C) slotted section for tool & accessory bags

Materials

- | | |
|------------|-----------|
| Webbing - | Polyester |
| Hardware - | Steel |
| Rope - | Polyester |

3. Inspection

Your safety depends upon the integrity of your equipment.

Trans-Web recommends inspection by a competent person at least once every 12 months. Check your local regulations and reduce the inspection period in instances of intense and frequent usage. Record the results of the inspection on the included inspection record, or another suitable register.

Details should include the type, model, manufacturer, individual serial number, date of manufacture, first use, and next periodic inspection. Note any problems, comments, and include the inspector's name and signature.

Pre-use

Thoroughly check the textile materials at any point which interacts with hardware, especially at the adjustment buckles and attachment points. Inspect all safety stitching (contrasting colour). Look for cuts, wear, and damage due to use, to heat, to chemicals etc. Be particularly careful to check for cut or loose threads. Verify that the buckles, mechanisms and other operations function properly.

During use

It is important to regularly monitor the condition of the product and its connections/interactions with the other safety equipment in the safe system of work. Make sure that all items of equipment are correctly positioned with respect to each other and do not become inhibited from correct performance by each other.

4. Compatibility

Verify that this product is compatible with the other elements of the system in your application by connecting as much of the system together at ground level, and check that the items interact as expected. Compatible products will show a good level of functional interaction i.e., not become tangled, twisted or snag on each other. All safety equipment used must meet current standards in your country (e.g. EN for Europe, UKCA for United Kingdom).

5. Setup

Position the belt such that the d-rings are approximately positioned above the hip bones, as this will provide the greatest level of comfort during use.

When fitted and adjusted, stow the excess webbing (folded flat) in the elastic keeper.

6. EN 358:2018 work positioning and restraint belt

The rope d-ring attachment points must only be used to attach to a restraint or work positioning systems which restrict the maximum fall height to <0.6 m. If in doubt, refer to the individual product instructions for the lanyard to be used with the belt.

Do not use a work positioning belt if there is any potential risk of the user becoming

suspended or falling. For work positioning, select and use an anchor point situated at or above waist level and use with both attachment points simultaneously. This will provide the greatest level of comfort and support during use.

The waistbelt is designed and approved for one user, including his/her tools and equipment, for a maximum waist size of 1.4m (55") with a body mass of 100kg.

These attachment points are not designed for and must not be used for fall-arrest.

7. Additional information

This product meets the requirements of Regulation (EU) 2016/425 on personal protective equipment. The EU declaration of conformity is available at www.trans-web.co.uk.

You must have a rescue plan and the means to rapidly implement it in case of emergencies while using this equipment.

- Selection and positioning of anchor point for the system should be located above the user's position and MUST meet the requirements of the EN 795 standard (>12 kN).
- Always select anchors which are positioning above the user attachment point.
- When using multiple items of equipment and PPE, be aware that the combination of operation of each item of equipment may inhibit the correct function of another.

- Ensure that your products do not rub against aggressive or sharp surfaces.
- Users must be medically fit for activities at height.
- **WARNING** When required, initiate the rescue response as fast as possible. Suspension for prolonged periods can result in serious injury or death.
- The Instructions for Use for each item of equipment used in the safe system of work with this product must be followed.
- The Instructions for Use must be provided to the user of this equipment, in the language of the country where the equipment is used.
- Make sure the markings on the product are legible.
- A product must be retired when:

It is over 10 years old or has passed the lifespan duration indicated in the product instructions.

It has been subjected to a fall or excessive load.

It fails to pass inspection.

You have any doubt as to its reliability, or do not know its full usage history.

WARNING

Any event can lead you to retire a product after only one use, depending on the situation. Intensity of use, the environment the product is used in usage i.e., marine environments, contact with sharp or aggressive edges, exposure to extreme temperatures, chemical contamination etc...

The product may become enforceably retired due to changes in legislation, standards, or local guidance
In the event of retiring a product it must be destroyed to prevent further use.

The product includes manufacturers guarantee against any material or manufacturing defect. Exclusions include normal wear and tear, contamination, modifications or alterations, incorrect storage, poor maintenance, negligence, or use for which this product is not designed.

All Trans-Web PPE is supplied with copies of the EU and or UKCA declaration of conformity.

Please visit www.trans-web.co.uk for additional copies or scan the QR Code.

